eSSL®
Security at Fingertips



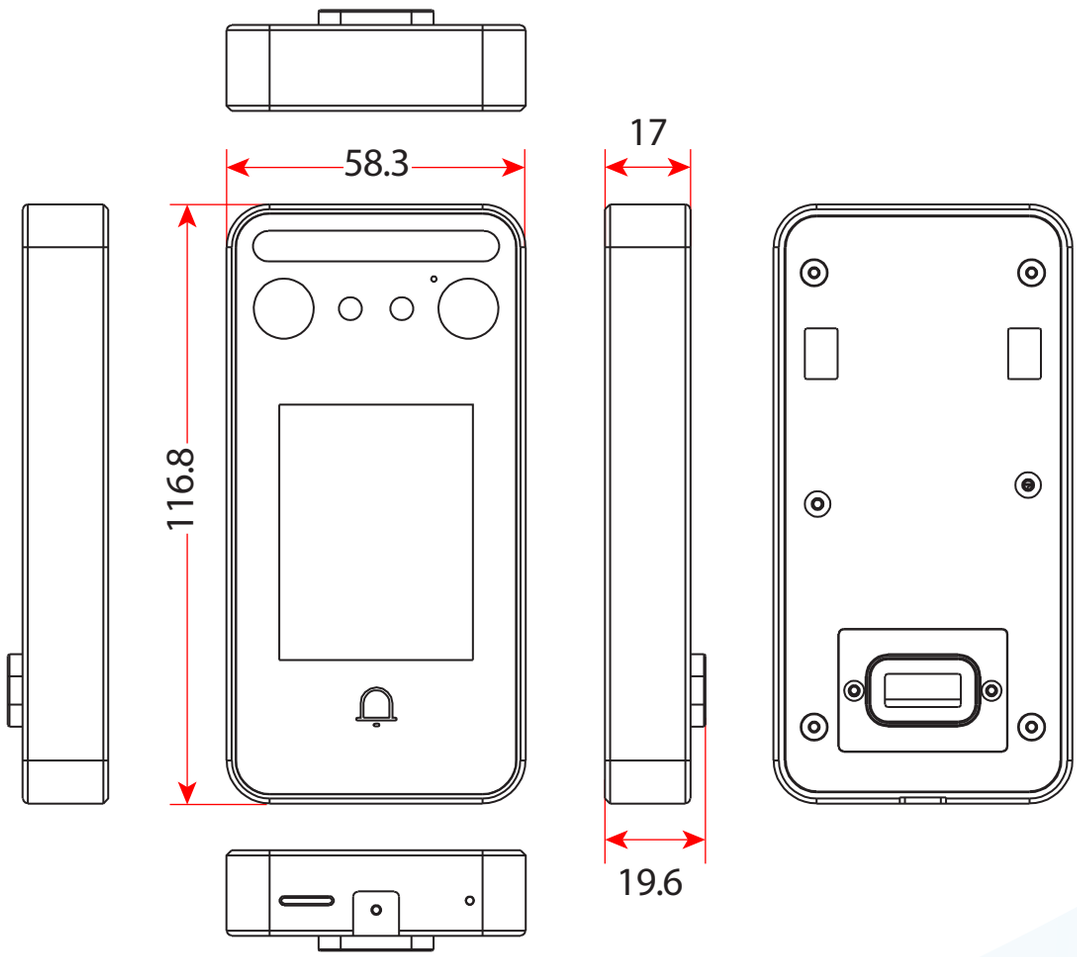

# Aiface Magnum Lite

## Specification

| | |
|---|---|
| Display | 2.4-inch touch Screen |
| User Capacity | 10,000 |
| Card Capacity | 10,000 |
| Face Capacity | 1,500 |
| Logs Capacity | 200,000 |
| Multiple authentications | Facial recognition / RFID card / Password |
| Facial Recognition Distance | 0.3-1.2m |
| Facial Recognition Rate | FAR ≤ 0.001%; FRR ≤ 1% |
| Card Reading Distance | ≤ 3cm |
| Communication | TCP / IP, Wi-Fi (Optional) |
| Operation System | Linux |
| Hardware | CPU : 1GHz Dual Core<br>RAM : 256MB<br>ROM : 512MB |

| | |
|---|---|
| Access Control Interface | Electro Magnetic Lock/ Electric Lock, Door Sensor, Exit Button, No touch Sensor |
| Supported Software | eTimetracklite Software |
| Power Supply | 12V 1.5A |
| Operating Temperature | -5°C~45°C |
| Operating Humidity | 10% - 90%RH |
| Dimensions(L*W*D) | 116.8*58.3*17.0mm |

## Dimension




Disclaimer : Brief specifications are mentioned here. Specifications may change without prior notice. Customers are advised to check with us before purchase. Actual product may differ slightly to that depicted for ongoing product development.

www.esslsecurity.com

ISO FC CE ROHS