eSSL®
Security at Fingertips



Aiface Mars+QR

Specification


Display : 5-inch Touch Screen
Face Template : 6000
Card Template : 10000
Transaction : 200000
Operation System : Linux
Multiple Verification Methods : Face / QR Code / Card / Password
Hardware :

- 900MHz Dual Core CPU,
- Memory 1G RAM / 8G Flash, 2MP WDR Low Light Camera,
- Barcodes Scanning

Communication : TCP/IP, Wi-Fi (Optional), Wiegand Input/output, RS485
QR Sensor : QR Code, PDF417, Data Matrix, MicroPDF417
Access Control Interface : Electro Magnetic Lock/ Electric Lock, Door Sensor, Exit Button, Auxiliary Input, Auxiliary Output (Alarm)
Optional Function : 13.56MHz IC Card (MF)
Facial Recognition Speed : ≤1s

Power Supply : DC 12V, 3A
Operating Humidity : 10% to 90%
Operating Temperature : -10°C to 45°C
Dimensions (W*H*D) : 91.93 * 202.93 * 21.5 (mm)
Supported Software : eTimeTracklite, eBioServer

Dimension

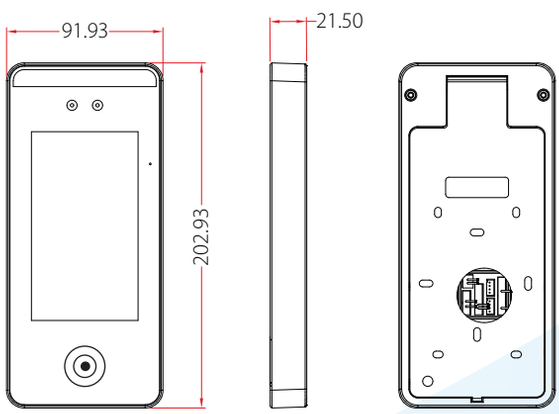

Disclaimer : Brief specifications are mentioned here. Specifications may change without prior notice. Customers are advised to check with us before purchase. Actual product may differ slightly to that depicted for ongoing product development.

www.esslsecurity.com

ISO FC CE ROSH

eSSL Security Machine
ATTENDANCE · ACCESS · SECURITY
eSSL Security Machine, Gurugram
Supply, installation and AMC for eSSL products
Call / WhatsApp: +91 92204 21199
esslsecuritymachine.com