
eSSL C3-400

Four-door networked access control panel for 30,000 users

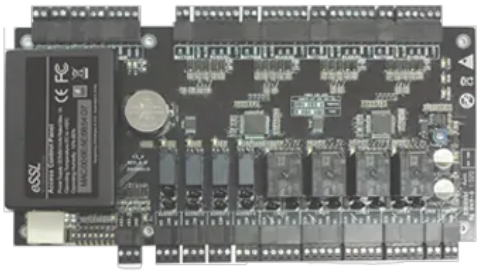

Key features

- Controls up to 4 doors
- 256 time zones and 256 access levels
- Anti-passback, interlock and linkage functions
- Multi-card opening and remote door open/close
- Auxiliary inputs for detectors, fire or smoke alarms; auxiliary outputs for alarms, cameras or bells

Specifications

Doors	4
User capacity	30,000
Event buffer	100,000
CPU	32-bit MIPS
RAM	32 MB
Flash memory	128 MB
Communication	TCP/IP, RS485
Reader types	26-bit Wiegand and RS485 FR-series readers
Inputs	12 (4 exit device, 4 door status, 4 auxiliary)
Outputs	8 (4 Form C lock relays, 4 Form C auxiliary relays)
Power	9.6–14.4 V DC, rated max 1 A
Operating temperature	0 °C to 55 °C
Operating humidity	10% to 80% (non-condensing)
Dimensions	Board 218 × 106 mm; with power supply and metal box 345 × 275 × 70 mm
Software	Access Security System 3.5 (desktop), MS Access / MS SQL

Specifications are taken from eSSL's published data and can change with model revisions. Please confirm the exact version with us before ordering.

eSSL Security Machine, Gurugram
Supply, installation and AMC for eSSL products

Call / WhatsApp: +91 92204 21199
esslsecuritymachine.com

Need a price or a site visit? Call or WhatsApp **+91 92204 21199**. We supply, install and service eSSL products in Gurugram. More details at esslsecuritymachine.com