
eSSL®
Security at Fingertips



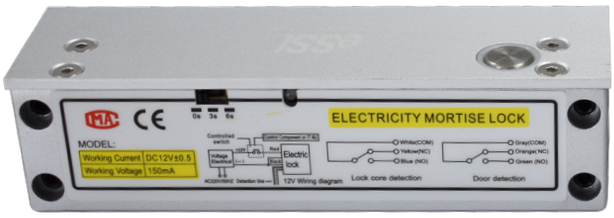

Drop Bolt -10

For Frameless Glass Door

Specification

Description : Drop Bolt for Frameless Glass Door
Working Voltage：DC：12V
Working Current：12V：900mA±50mA
Standby Current : 12V: 200mA±50mA
Plate Material : Aluminum
Plate Finishing : Anodization
Working Feature : Fail Safe
Working Temperature : -10～+55°C
Working Humidity : 0～90%
Bolt Diameter : 14.5MM
Bolt Material : Aluminum
Bolt Length : 15MM
Face Plate : 145LX43WX38H (mm)
Strike : 145LX43WX24H (mm)
Time Delay : 0, 3, 6,9S
Suitable for : Glass Door

Disclaimer : Brief specifications are mentioned here. Specifications may change without prior notice. Customers are advised to check with us before purchase. Actual product may differ slightly to that depicted for ongoing product development.

www.esslsecurity.com

ISO FC CE ROHS