

Elevator Controller

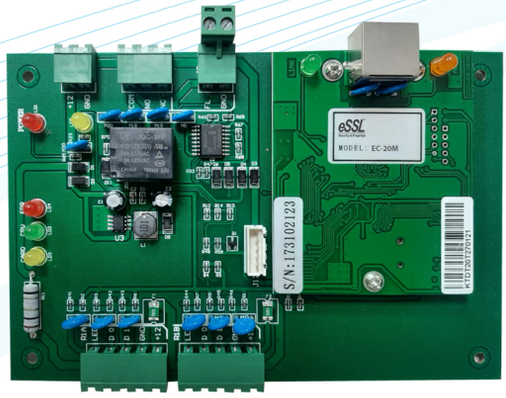

EC-20M

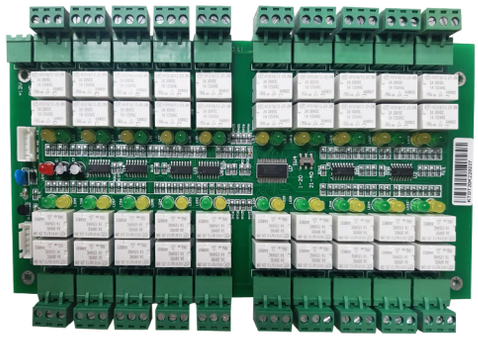

EC-20K


Extension Board

Specification

Control floors : 20 floors
Card qty supported : 20,000 cards
Storage : 100,000 records
(records kept even power off)
Communication method : TCP/IP
Input : one reader or
other biometric devices
with wiegand 26 bits/34 bits
PCB size : 164*106mm
Fire signal input: 1 line
Power supply : DC 12V (Professional
access power supply of item
DY12 is recommended)
Supporting software : working with eSSL access management software, all-in-one solutions (access control, Elevator, etc.)

EC-20K

Support with EC20M elevator controller,
one EC-20M elevator controller mostly can
work with 2 EC-20K Extension Board
Output : 20 lines for each extension board
PCB Board size : 219*115mm
Supporting software : working with eSSL access management software, all-in-one solutions (access control, Elevator, etc.)

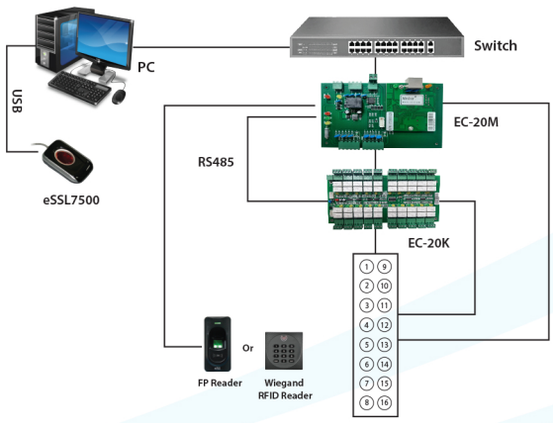

Disclaimer: Brief specifications are mentioned here.Specifications may change without prior notice. Customers are advised to check with us before purchase. Actual product may differ slightly to that depicted for ongoing product development

www.esslsecurity.com

ISO FC CE RoHS

eSSL Security Machine
ATTENDANCE · ACCESS · SECURITY

eSSL Security Machine, Gurugram
Supply, installation and AMC for eSSL products

Call / WhatsApp: +91 92204 21199
esslsecuritymachine.com