eSSL®
Security at Fingertips


# Flap Barrier


## FB-E-2000



## Specification

**Power Requirements : 100~240V AC**
**Working Temperature : -28OC to 60OC**
**Working Humidity : 5%~80%**
**Working Environment : Indoor/outdoor (if sheltered)**
**RFID : Maximum 35/ minute**
**Fingerprint : Maximum 25/ minute**
**Face : Maximum 11/ minute**
**Vein : Maximum 23/ minute**
**Lane width(mm) : 550**
**IP rating : IP44**
**Input : Dry Contact**
**Unlock Time : 0.2 sec**
**Dimensions(mm) : L=1200, W=280, H=980**
**Net Weight(kg) : 52 kg(single machine)**
**87kg(double machine)**
**LED Indicator : Yes**
**Cabinet Material : SUS304 Stainless Steel**
**Lid Material : SUS304 Stainless Steel**
**Barrier Material : Transparent Acrylic light (Red, Green & Blue)**
**Barrier Movement : Retracting**
**Emergency Mode : Yes**
**Security Level : Medium**
**MCBF : 3 million**

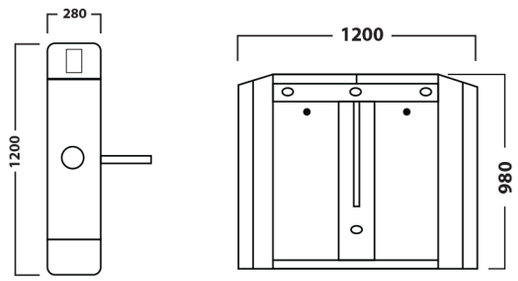


Disclaimer: Brief specifications are mentioned here.Specifications may change without prior notice. Customers are advised to check with us before purchase. Actual product may differ slightly to that depicted for ongoing product development

**www.esslsecurity.com**

ISO FC CE RoHS