Full Height Turnstile

FHT-TL-232






Parameters

Material	SUS304	**Input voltage**	100V~240V
Size	2200*1500*2200mm	**Driving voltage**	24V
Unlock time	0.2s	**Environment**	-15~+55℃
Pass rate	30p/m	**Power**	30W
Pass width	650mm	**Input signal**	Dry contact

Features

- Stable and reliable mechanical locking device, precise movement and turntable combination structure with special technology;
- With two-way traffic function, the brake lever steering is divided into two-way and one-way;
- With the function of power-off and opening, in case of emergency, the cross shaft rotation shaft is switched from locked to free passage mode, and pedestrians can pass quickly to meet the requirements of the fire protection passage;
- After the pedestrian reads the valid card, if the system does not pass within the specified time, the system will automatically cancel the pedestrian's access permission;
- Install a two-way arrow indicator to indicate the passing status, whether passing or not;
- There is a DIP switch on the control panel, which can adjust the pass delay time through an algorithm, and can also be adjusted to a memory mode, for example: swiping a valid card five times and passing five people;
- Anti-reverse device function prevents the rotating unit from rotating in the opposite direction to the original direction

Product Size

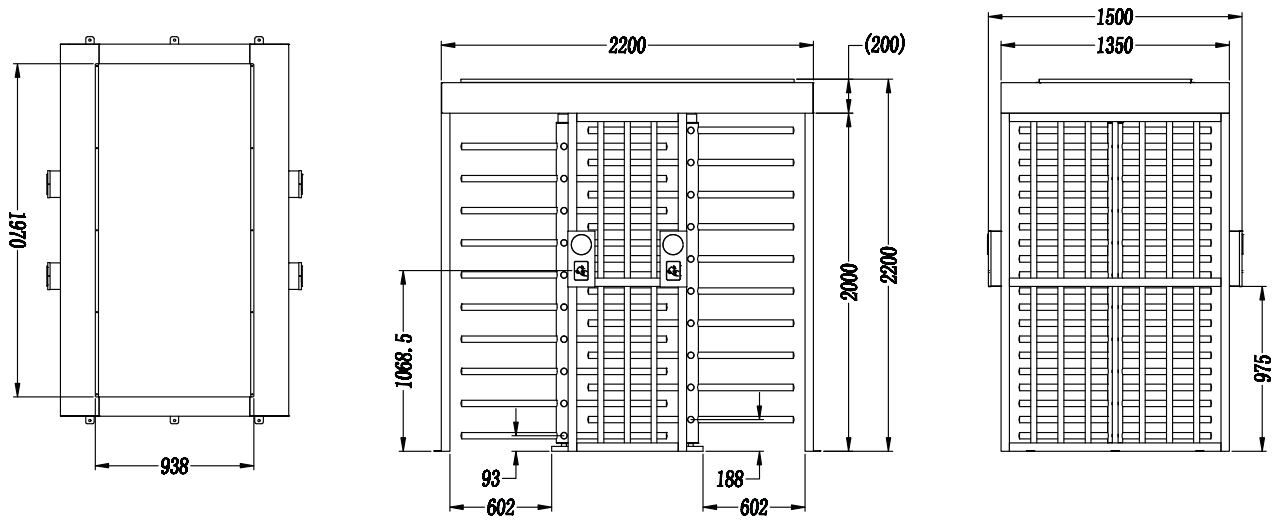

Disclaimer: Brief specifications are mentioned here.Specifications may change without prior notice. Customers are advised to check with us before purchase. Actual product may differ slightly to that depicted for ongoing product development

Visit Us at: www.esslsecurity.com

eSSL Security Machine
ATTENDANCE · ACCESS · SECURITY

eSSL Security Machine, Gurugram
Supply, installation and AMC for eSSL products

Call / WhatsApp: +91 92204 21199
esslsecuritymachine.com