
eSSL®
Security at Fingertips

Full Height Turnstile - Double Door

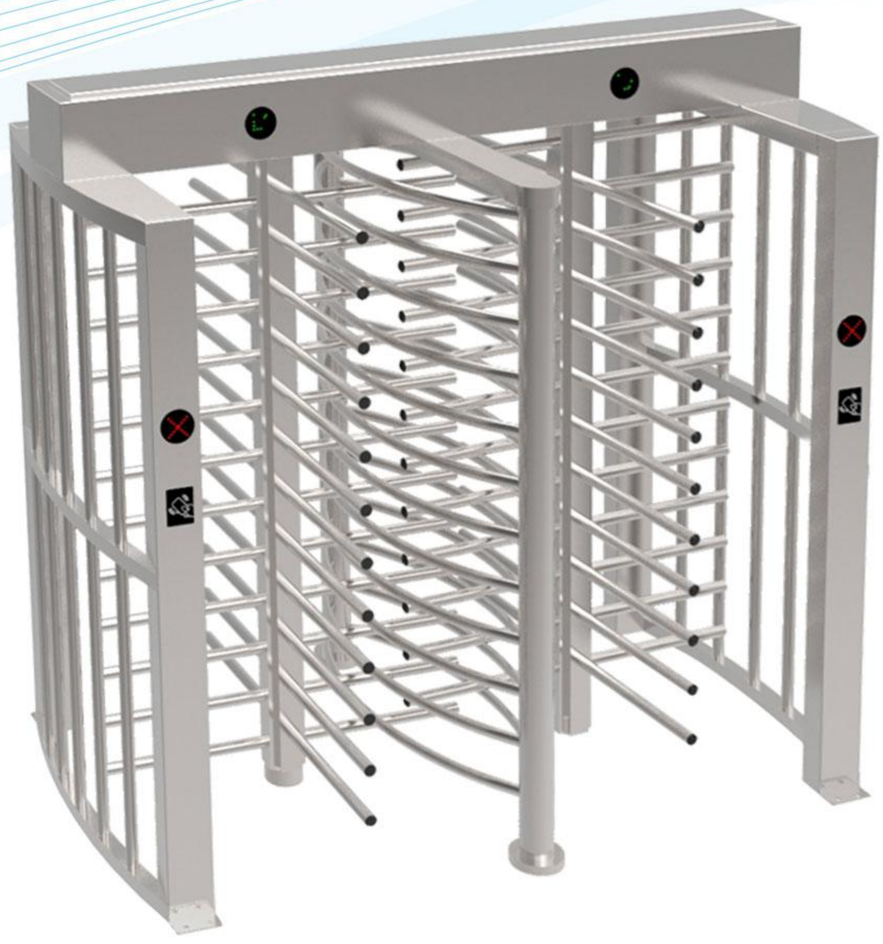

FHT-TL-249

Specification

Frame : 304 Stainless Steel
Rotation Direction : A. Bi-Directional
B. In directional
Controller : Adopt micro-computer controller can be programmed according to customer controller can be used for other integration systems
Signal Source : 1. Dry contact
2. High-low-level signals
Roller working Power: AC220V±10%
Power Supply : AC220V±10%,
DC24V3A±10%, DC12V3A±10%
Environment : Indoor/Out door
Temperture : -30°C to 80°C
Humidity :5% to 90%
Traffic Speed : 25 person per Minute
Fault Status : Power-safe and Giving a free exit/entry path

MCBF : 5 Million Cycles
Frame Protection : IP 44
Card Reader Location : 4
Installation and maintenance portal : 1
Optional Feature : IC/ID reader, Barcode Reader, other R/W equipment, UPS, Infrared detector

Disclaimer: Brief specifications are mentioned here.Specifications may change without prior notice. Customers are advised to check with us before purchase. Actual product may differ slightly to that depicted for ongoing product development
www.esslsecurity.com

ISO FC CE RoHS

eSSL Security Machine
ATTENDANCE · ACCESS · SECURITY
eSSL Security Machine, Gurugram
Supply, installation and AMC for eSSL products
Call / WhatsApp: +91 92204 21199
esslsecuritymachine.com