eSSL®
Security at Fingertips



Biometric Handle Less Door Lock


FL 300

Specification

Main Body Material : Alum. Alloy
Bolt Material : ZINC ALLOY
Fingerprint Capacity : 100
ID Card Capacity : 99
Password Capacity : 30
Voice Guidance : Yes
Handing : Universal
Fingerprint Sensor : semiconductor
Fingerprint Users (no) : 100
Emergency Key Type : S-slot multi track
Emergency Key (no) : 1
Card Type : Like Mifare/14.7 Mhz+_0.3
Card Users (No) : up to 99, box put 2
Keypad Type : Touchpad
Code Length : 8
Pin Code (Users) : 5 master+15 user+10 temtery
Working Voltage : 6V
Battery : 4 AA
Working Temp (Degree Celsius) : minus 25 to 70 degreen
Emergency Power : Like 5 V Micro USB

DOOR Thickness =35 mm to 65mm
Spindle available and size
65mm=1no

Dimension

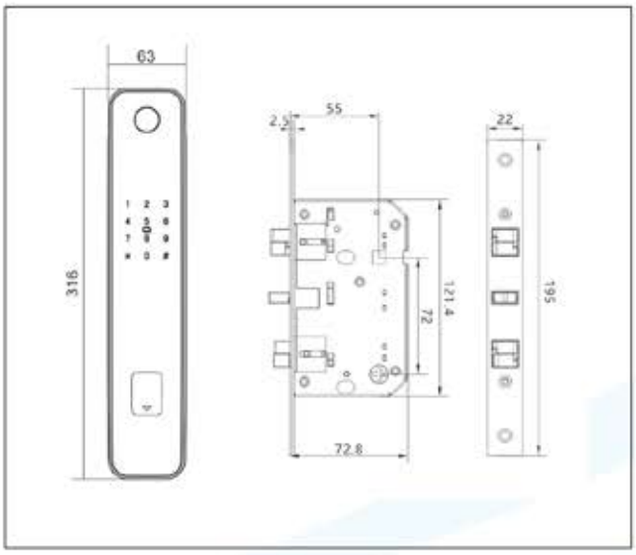

Disclaimer: Brief specifications are mentioned here.Specifications may change without prior notice. Customers are advised to check with us before purchase. Actual product may differ slightly to that depicted for ongoing product development
www.esslsecurity.com

ISO FC CE RoHS

eSSL Security Machine
ATTENDANCE · ACCESS · SECURITY
eSSL Security Machine, Gurugram
Supply, installation and AMC for eSSL products
Call / WhatsApp: +91 92204 21199
esslsecuritymachine.com