eSSL®
Security at Fingertips

RFID Guard Patrol



GP-RFID-102


Specification

Storage Capacity : 60, 000 pieces
Battery : 3.7V lithium rechargeable battery.
Communication : USB 2.0, no need drive
Operating Temperature : -40°C to + 85°C

Features :

Impact detect
Flashlight
Magnetic connection cable
123Khz card

Dimension

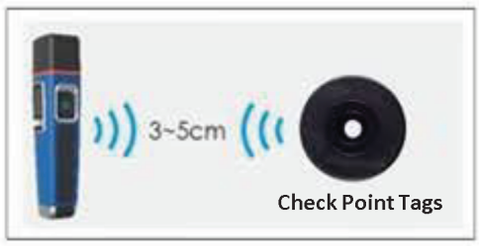



Disclaimer : Brief specifications are mentioned here. Specifications may change without prior notice. Customers are advised to check with us before purchase. Actual product may differ slightly to that depicted for ongoing product development.

www.esslsecurity.com

ISO FC CE ROHS