eSSL®
Security at Fingertips

Standalone Access Control


JS34



Water Resistant Metal Access Control

Specification

Capacity : 2000cards/codes
Three accesses : card, Pin, Card+Pin
Outdoor: IP66
Static electricity : <30mA
Ambient temperature : -45^{0}C~60^{0}C
Electric lock output : <3A
Short-circuit Protect : <100µ5
Card type : EM/MF
Working voltage : DC12V+10%
Reading Range : 5-8cm
Humidity : 10% to 90% RH
Door Opening Time : 0-99s (Adjustable)
Backlight keypad
Metal case, anti-vandal
Multi-function standalone access controller and reader, WG26 Input / output

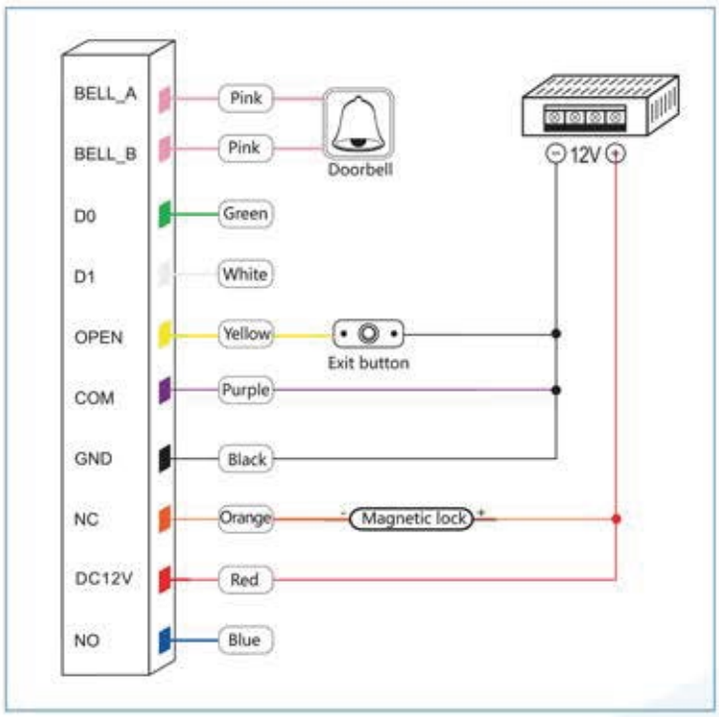

Disclaimer: Brief specifications are mentioned here.Specifications may change without prior notice. Customers are advised to check with us before purchase. Actual product may differ slightly to that depicted for ongoing product development

www.esslsecurity.com

ISO FC CE RoHS