eSSL®
Security at Fingertips

Palm Recognition
Multi-Biometric Time Attendance & Access Control System


P160



Specification

Display : 2.8-inch TFT Color Display
Palm Capacity : 600
Fingerprint Capacity : 3,000
Card Capacity : 10,000
Logs Capacity : 100,000
Communication : TCP/IP, USB-Host
Standard Functions : Automatic Status Switch, Self-Service Query, Work Code, T9 Input, 9 Digit User ID, DST, Scheduled-bell, SMS,RS232 Printer
AC module 1:Exit Button, Door Lock, Alarm,12V OUT,AUX IN
Optional Function :ID Card, MIFARE Card POE, 3G, Battery Module, ADMS
AC module 2: Exit Button, Door Lock, Alarm,12V OUT, AUX IN, Door Sensor, RS485,Wiegand IN/OUT.
Power Supply : 12V 1.5A
Verification Speed : ≤1 sec
Operating Temperature : 0 - 45 °C
Operating Humidity : 20% - 80%
Dimensions : 179.95 x 134.94 x 38.5 mm

Configuration

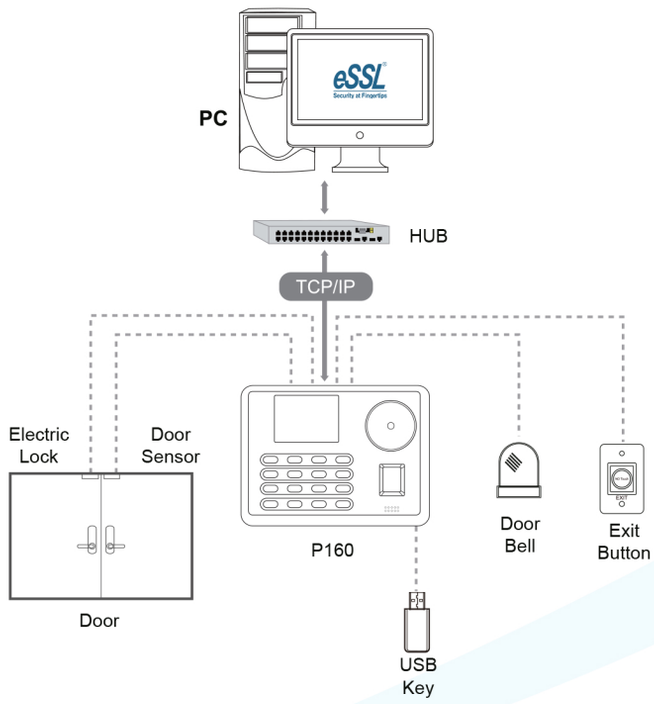

Disclaimer: Brief specifications are mentioned here.Specifications may change without prior notice. Customers are advised to check with us before purchase. Actual product may differ slightly to that depicted for ongoing product development

www.esslsecurity.com

ISO FC CE RoHS