eSSL®
Security at Fingertips

Standalone Access Control Device Supporting RFID & Password System



SA40


Specification

User Capacity: 2,000
Password Capacity : 2,000
Password : 4 to 6 digits
Verification Modes : Card Only / Password Only / Card and Password1 Relay / 1 Door Sensor / 1 Exit Button / 1 Doorbell
Dimensions : (L*W*H) 103.5*86*19 (mm) (±3mm)
Operating Frequency : 125kHz / 13.56MHz
RFID Type EM Card / IC Card, S50 S70 IC EV1
Operating Voltage : DC 9 to 15V
Operating Temperature : -20°C to 60°C
Storage Temperature : -20°C to 80°C
Operating Humidity : 15% to 90%
Storage Humidity : 15% to 90%

Features

-- Password Length: 4 to 6 digits
-- RFID: 125kHz EM Card / 13.56MHz IC card, S50 S70, IC EV1
-- Operating Temperature: -20°C to 60°C
-- Humidity Storage: 15% to 90%

Configuration

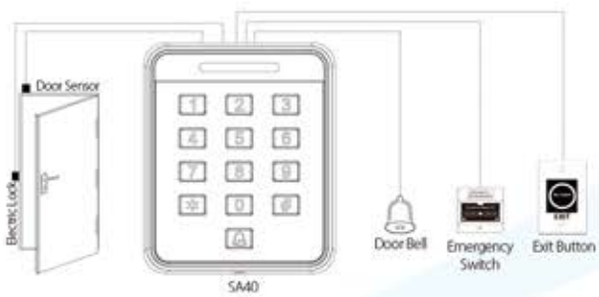

Disclaimer: Brief specifications are mentioned here.Specifications may change without prior notice. Customers are advised to check with us before purchase. Actual product may differ slightly to that depicted for ongoing product development

www.esslsecurity.com

ISO FC CE RoHS