eSSL®
Security at Fingertips

Multi Lane Swing Barrier





SB-ES-3012-2

Specification

Product Size: 1200*185*980mm
Pass Width: 600mm
Net Weight: 65kg
Thickness: 1.0mm
Material: 1.0mm SUS 304
Operating Time: 0.2 Seconds
Top cover Material: 1.2mm SUS304
Arm Material: 10mm Transparent Acrylic
Driver: Brushed Motor
Infrared Sensor: 4pairs
Pass rate: 20-35p/m
Power Supply: 100-240V(AC)
Operational Voltage: 24V(DC)
Max Power Consumption: 35W
Frequency: 50-60hz
Working Temperature: -25 to +70 ☒
MCBF: 5,000,000cycles

Dimensions

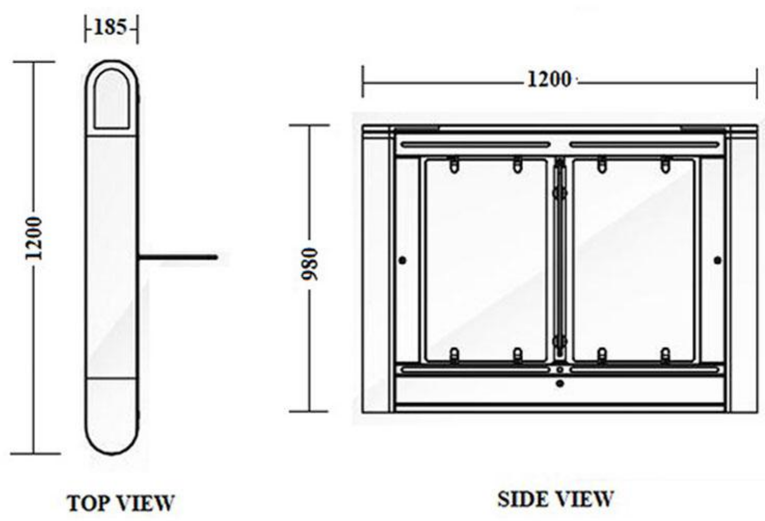

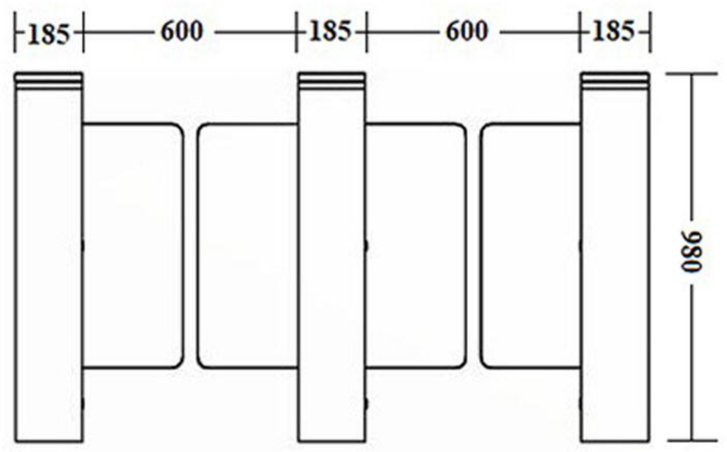

TWO LANE SYSTEM

Disclaimer: Brief specifications are mentioned here.Specifications may change without prior notice. Customers are advised to check with us before purchase. Actual product may differ slightly to that depicted for ongoing product development

www.esslsecurity.com

ISO FC CE RoHS

eSSL Security Machine
ATTENDANCE · ACCESS · SECURITY
eSSL Security Machine, Gurugram
Supply, installation and AMC for eSSL products
Call / WhatsApp: +91 92204 21199
esslsecuritymachine.com