eSSL®
Security at Fingertips




SmartGuard RF

specification

Frequency	8.2MHz
Mainboard	RF mono/RF Dual Board
Frame Color	Transparent
Material	Acrylic
Wiring	3 loops
Power Consumption	TRx Antenna: 30W Tx Antenna: 15W Rx Antenna: 15W
RF Label Tag Detection Range 2 antennas	1.2M - 1.5M
RF Hard Tag Detection Range	1.5M - 2.0M
Base Cover	Customized
Net / Gross weight	20KG (1pcs)
Packaging	1610*450*150mm
Operating Voltage	110 ~220 Vac
Dimension	1580*360*20mm
Output	24 Vdc 3A
Work Rate of Each Antenna	Mono 30W, Dual 25W, 1TX+2RX 40W
Temperature	-5°C to 50°C

Product features

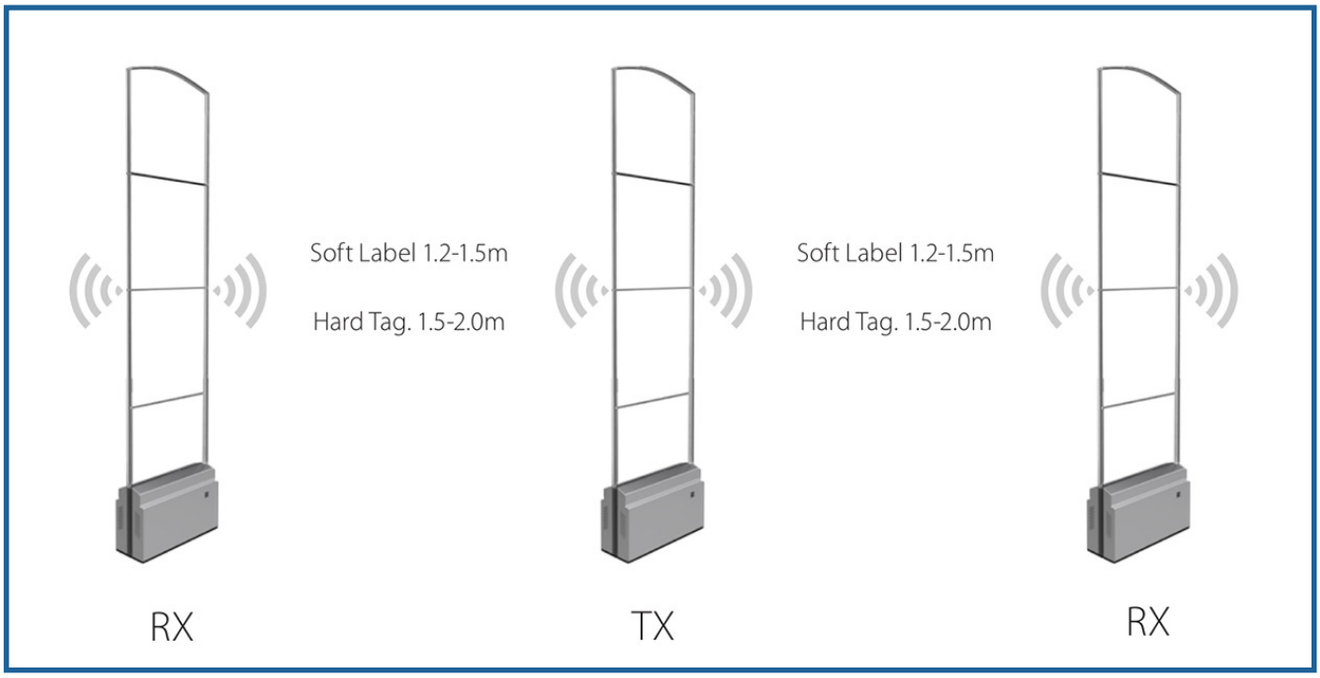

Disclaimer : Brief specifications are mentioned here. Specifications may change without prior notice. Customers are advised to check with us before purchase. Actual product may differ slightly to that depicted for ongoing product development.

www.esslsecurity.com

ISO FC CE ROHS