
eSSL®
Security at Fingertips

ELECTRIC STRIKE LOCK

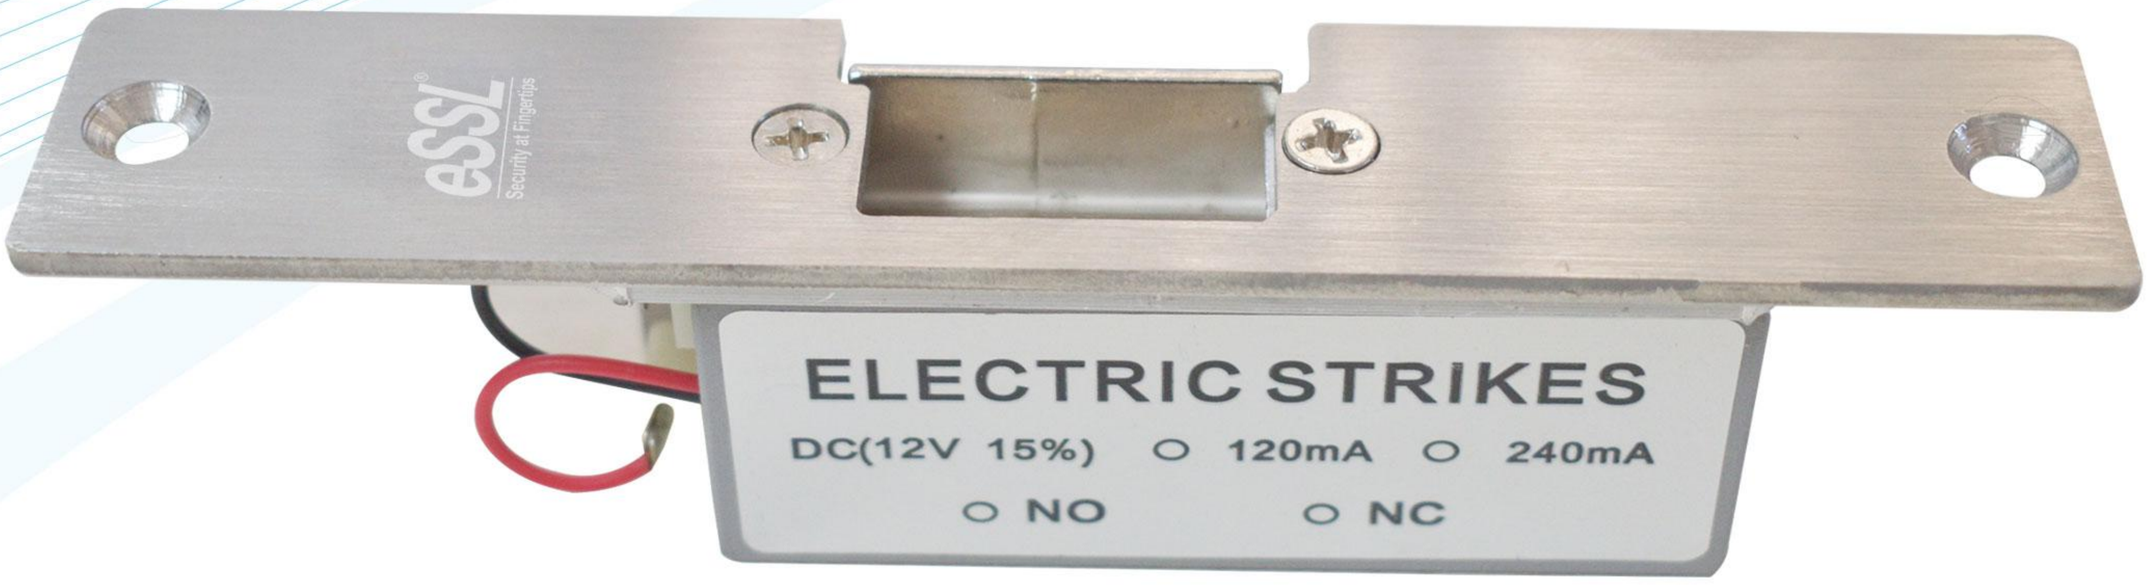

STRL-240-7

Specification

Input Voltage : 12VDC

Power Consumption : working Current: 120mA: Static Current; 240mA

Dimension : 150Lx34Wx28H(mm)

Suitable For : Narrow Wooden Door, Narrow Metal Door

Lock body & latch : Zinc alloy with nickle plating: Lock plate: Stainless steel

Coil : Copper wire

Accessory : Screws pack

Remark : fail secure only for type with button

Disclaimer: Brief specifications are mentioned here.Specifications may change without prior notice. Customers are advised to check with us before purchase.
Actual product may differ slightly to that depicted for ongoing product development
www.esslsecurity.com

ISO FC CE RoHS